
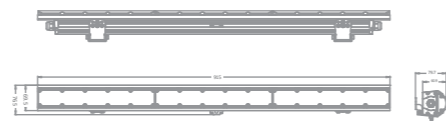


As a new generation of linear wall washer, AM713 is seamless, perfectly stitching designed LED fixture with a length of 915 millimeter, with power supply and driver built in lamp body, integrated power and DMX signal cable. Flexible lighting device for application in a variety of building structures.

## AM713T/XCET GRAZE i27/GRAZE 27Q

NEW

Illuminance diagram

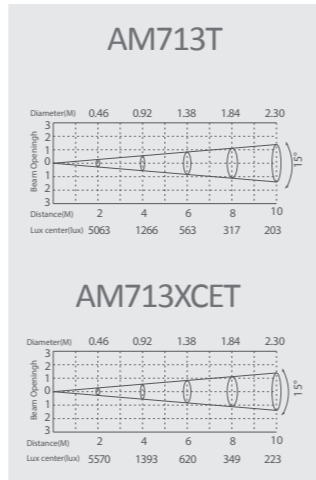

### Technical data



	GRAZE i27 AM713T	GRAZE 27Q AM713XCET
Input Voltage	AC100~240V	AC100~240V
Max. Power	60W	60W
Power Factor	>0.9	>0.9
Lumen	2053lm	2258lm
Peak Intensity	23000cd (15°)	25300cd (15°)
LED Qty	27pcs (9R+9G+9B)	27xMultichip RGBW
Optics	15° (10°,25°,30°,15° x 30°)	15° (10°,25°,30°,15° x 30°)
DMX control channels	0-100%	0-100%
Interface	DMX、RDM	DMX、RDM
Controllable sections	1	1
Mains connection		
Data connection	Integrated power and signal cable	Integrated power and signal cable
IP Rated	IP66	IP66
Operation temperature	-40°C~45°C (operating) -20°C~45°C (startup)	-40°C~45°C (operating) -20°C~45°C (startup)
Housing material	Extruded aluminium	Extruded aluminium
Housing color	Silver	Silver
Dimensions	915x62x84mm	915x62x84mm
Weight	3.6kg	3.6kg

- Built-in power supply
- RDM bidirectional feedback function
- Seamless light splicing; no light crack
- The international standard design
- 0%-100% 16 Bit dimming technology

## AM714T/XCET GRAZE i36/GRAZE 36Q

NEW

Illuminance diagram

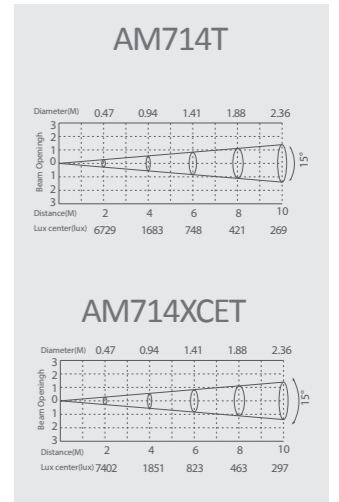

### Technical data

	GRAZE i36 AM714T	GRAZE 36Q AM714XCET
Input Voltage	AC100~240V	AC100~240V
Max. Power	80W	80W
Power Factor	>0.9	>0.9
Lumen	2636lm	2900lm
Peak Intensity	31000cd (15°)	34100cd (15°)
LED Qty	36pcs (12R+12G+12B)	36xMultichip RGBW
Optics	15° (10°,25°,30°,15° x 30°)	15° (10°,25°,30°,15° x 30°)
DMX control channels	0-100%	0-100%
Interface	DMX、RDM	DMX、RDM
Controllable sections	4	4
Mains connection		
Data connection	Integrated power and signal cable	Integrated power and signal cable
IP Rated	IP66	IP66
Operation temperature	-40°C~45°C (operating) -20°C~45°C (startup)	-40°C~45°C (operating) -20°C~45°C (startup)
Housing material	Extruded aluminium	Extruded aluminium
Housing color	Silver	Silver
Dimensions	1220x62x84mm	1220x62x84mm
Weight	4.8kg	4.8kg

- Built-in power supply
- RDM bidirectional feedback function
- Seamless light splicing; no light crack
- The international standard design
- 0%-100% 16 Bit dimming technology