



WK-C008 Waterproof Linear Inground

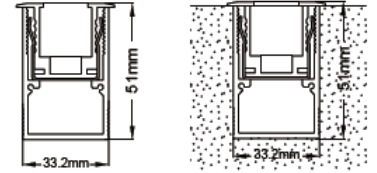

Application

Inground lights application


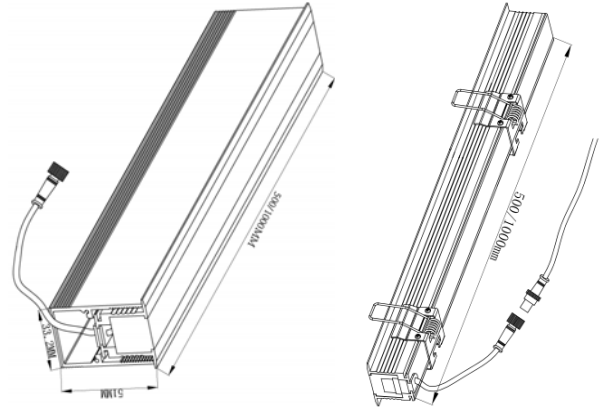


IP67 Waterproof Ceiling lights application







Inground lights application

One piece separately installation.

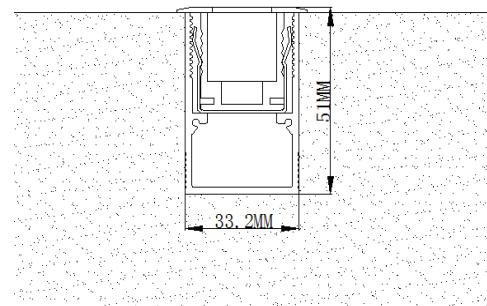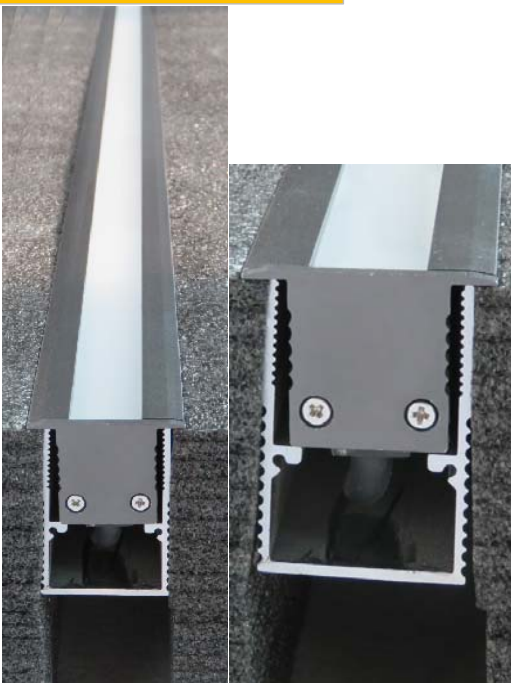


Two pieces can be installed together when removing the aluminium cap, and they look like one piece.

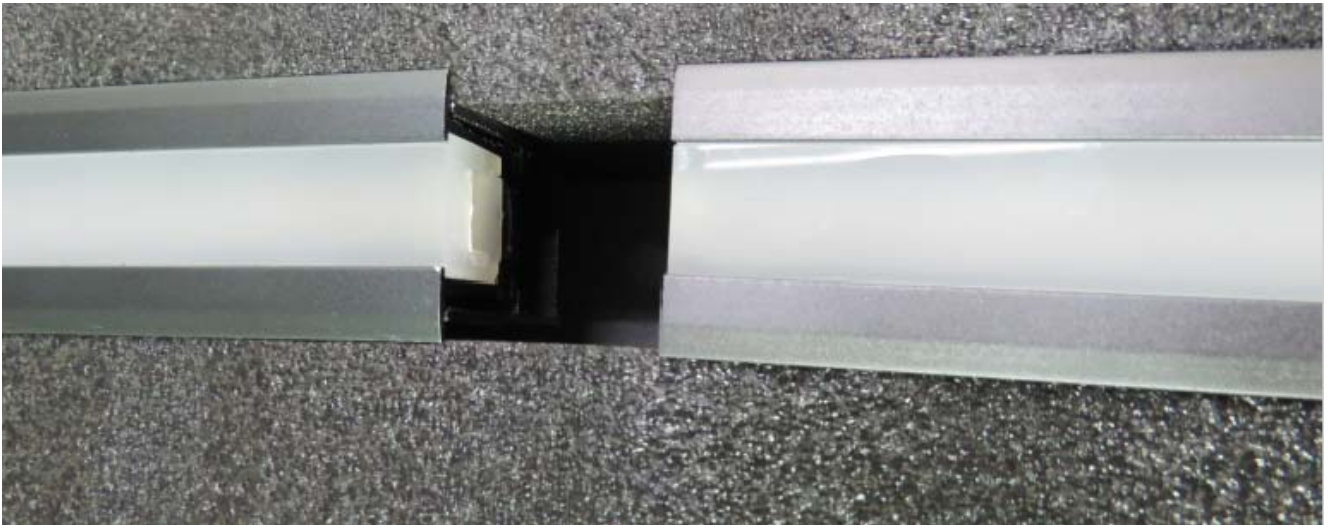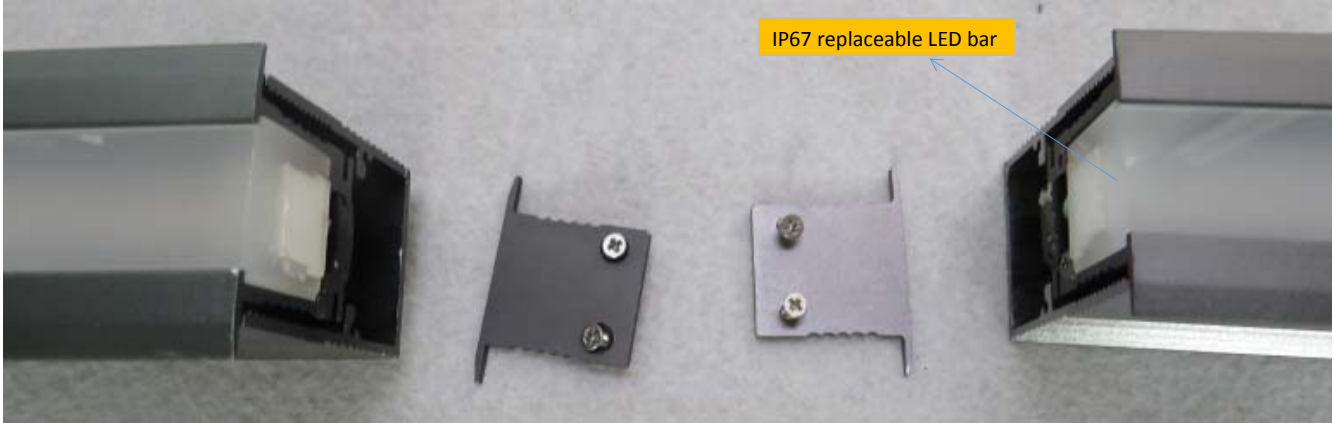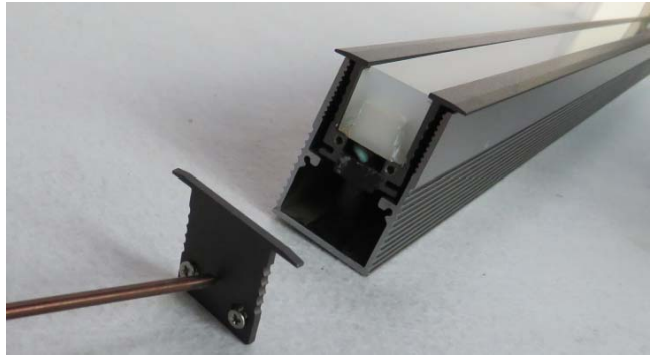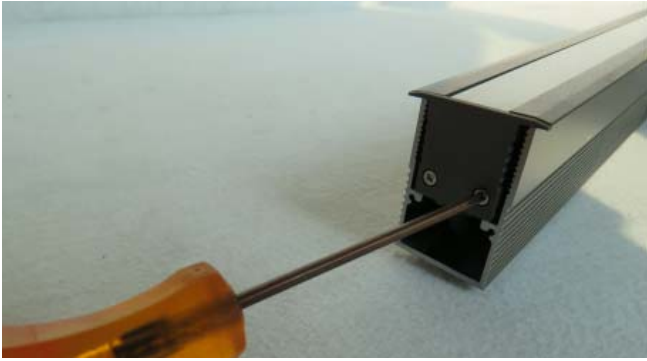


Ceiling lights application

One piece separately installation.

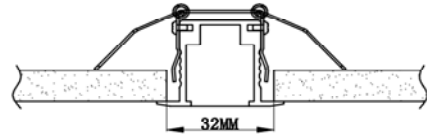

Two pieces can be installed together when removing the aluminium cap, and they look like one piece.

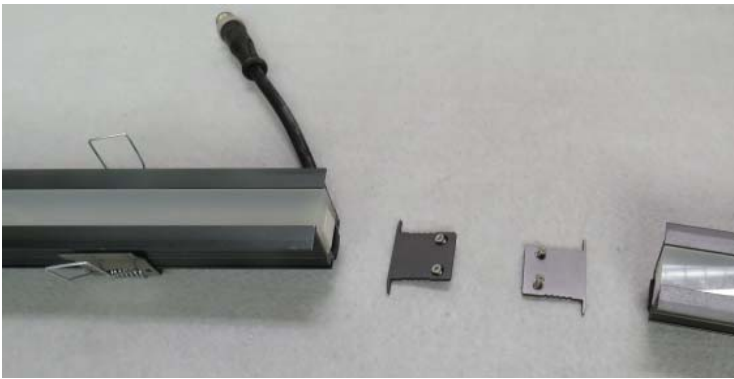

Features

- .It can be used as inground lights with the mounting sleeve or used as waterproof ceiling light with clips
- .316 Stainless Steel body and Aluminium sleeve
- .Linkable lengths up to 20M
- .There're no dark areas between two linear lights due to the aluminium cap on the both sides can be removeable.
- . Wonderful light output.
- . Beautiful appearance.
- . Excellent design of heat-conducting housing ensure long life time of LED.
- . Aluminium mounting sleeve which is better for heating to transmit to concrete or soil outside.
- . 20~25 um thickness of anti-crossion protective Passivated film for housing.
- . Aluminium trim with strong and thick PMMA diffuser.
- . Waterproof IP67.
- . 198 PCS SMD LED per meter for LEDs being un-visible when they are on
- . 3 years warranty.
- . Glue seal + waterproof connector for fasting installation.

General Data

Item No.	WK-C008
Power	24 Watts (12 watts as options)
LED type	198 PCS 2835 SMD LED
Luminous flux	1200~1350 lm (500~560lm for 12 watts)
CCT	2700K,3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	120°
Dimension	1000 x 33.2 x 51 (mm) Length x Width x Height (0.5 meters version as options)
Cut out	1000 x 33.2 x 51 (mm) Length x Width x Height
Net weight	1.720 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC24V (With a separately driver as options)
Insulation class	Class III
Cable	2 x cable 15cm H05RN-F 2x0.75mm square with IP67 waterproof connector male +female.
Driver	Low voltage constant current output ,excluding the transformer

Construction

IP rating	IP67 Waterproof
IK rating	IK08
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Passivated (Anodizing) Aluminum CNC machined
Glass	Without glass,but with strong PMMA diffuser
Loading capacity	2000 kgs
Cable Gland	Glue
Gasket	/

Accessories

Mounting Sleeve	Passivated (Anodizing) Aluminum CNC machined .Dark grey. With 2 PCS clips for mounting sleeve,
Others	2 PCS springs for ceiling lights applications,and 2 PC end caps with screws


Packaging

Inner box size	1020x40 x60 mm
Carton size	104*34*20 cm (24PCS / carton)


Passivated ! **3 Years Warranty** **IP67** **Inground lights and ceiling lights**
No dark areas !   **IK08**

Photometric Data (3000K, 120°) & Illumination Picture

Light Distribution Curve [Unit: cd]

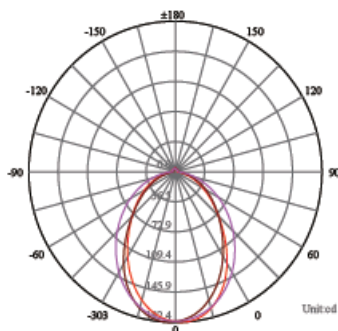

Lux distance Curve

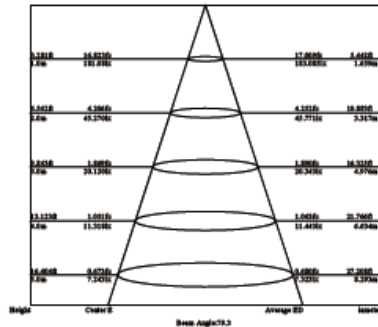

Illumination Picture

